
Protecta Harness Kit is designed to provide customers with the ideal fall protection equipment compiled into one convenient kit.

The kit includes: Protecta 3pt Harness, 11ft Retractable Lanyard, Pass Thru Adapter & Bag



# **3PT HARNESS**

Yellow full body harness with 3 point adjustment, dorsal D-ring, hip D-rings, adjustable mating buckle leg straps. Universal size. Meets or exceeds ANSI Z359.11-2014. A10.32-2012.

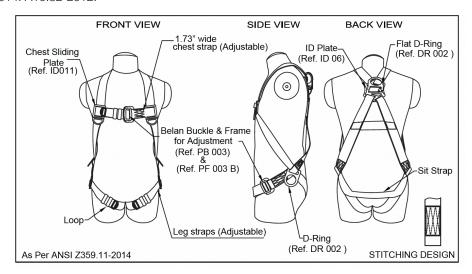

### **DESIGN**

- One dorsal attachment D-ring for fall arrest
- Two lateral D-rings at waist for positioning
- **WEBBING**
- Material: Polyester Width: 1.73 in. ± 0.04 in.
- STITCHING THREAD
- Material: High-tenacity polyester
- **METAL COMPONENT**
- Material: Alloy Steel
- **VITAL TEST COMPLIANCE**
- Static Strength: 3,600 lbs. of 1 minute
- Dynamic performance: Free fall from 6 feet height done to a test dummy weighing 220.46 lbs. at dorsal attachment element. Harness should not release the dummy for 5 minutes (retention time)


# **WEIGHT OF HARNESS**

2.91 lbs. ± 0.02 lbs.

- Adjustable leg straps
- Adjustable chest straps
- Breaking Strength: 5,000 lbs.
- Finish: Silver or Golden Yellow Galvanized

# ANCHOR CROSS ARM STRAP

3" strap in various lengths with large D-ring pass-through and small D-ring. Meets or Exceeds ANSI Z359.1-2007 and OSHA.

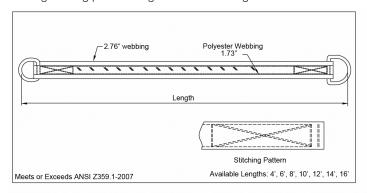

# Installation Examples: Structure Cross Arm Strap

### **DESIGN**

• 1.73 in. wide polyester webbing stitched with 2.76 in. webbing on the back for extra protection.

### **WEBBING**

Material: Polyester

■ Width: 1.73 in. ± 0.04 in. and 2.76 in. ± 0.04 in.

■ Breaking Strength: 5,000 lbs.

# STITCHING THREAD

Material: High-tenacity polyester

## **METAL COMPONENT**

Material: Alloy Steel

• Finish: Silver or Golden Yellow Galvanized

■ Breaking Strength: 5,000 lbs.

### **VITAL TEST COMPLIANCE**

Static Strength: 18 kN for 3 minutes

Dynamic performance: Free fall from 4.92 ft. height with test mass of 220.46 lbs.

### **WEIGHT**


■ 3.28 ft.: 0.99 lbs. ± 0.02 lbs.

• 4.92 ft.: 1.10 lbs. ± 0.02 lbs.

• 6.56 ft.: 1.21 lbs. ± 0.02 lbs.

# 11' RETRACTABLE LANYARD

11' retractable web, swivel top plastic housing, 3/4" load indicator hook, 1/2" carabiner included. Blue housing. Min breaking strength 4500 lbs. Meets or Exceeds ANSI Z359.14-2021 Class 1.

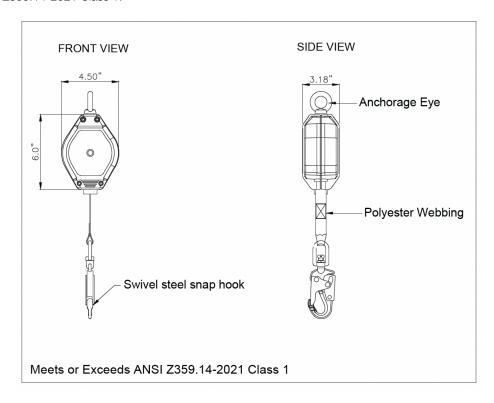

### **PHYSICAL PARAMETERS**

- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end

# **LENGTH**

11 feet

### **WEBBING**

- Material: Polyester
- Width: 1in.

# **WEIGHT**

• 3.52 lbs. ± 0.11 lbs.

### **CONFORMS TO**

Meets or Exceeds ANSI Z359.14-2021 Class 1

- Swivel steel snap hook with load indicator at attachment end
- Polyester Webbing

• Min. Breaking Strength: 4,500 lbs.

www.allfasteners.com | Customer Service 888.859.6060