

**ROD HANGERS**

ZINC PLATED FOR STEEL & WOOD

AF Rod Hanger features an internal thread to facilitate bolt and rod connections. It is a one piece, steel anchor designed for rod hanging applications such as mechanical/fire sprinkler systems, ductwork/HVAC, electrical and pipe hanging. The rod hanger can be installed into substrates such as wood, metal deck and steel purlins.

VERTICAL
FOR STEELVERTICAL
FOR WOODHORIZONTAL FOR
STEELHORIZONTAL FOR
WOOD**PERFORMANCE DATA****Rod Hanger With Hex Coupler Head Installation Parameters¹**

Characteristics	Symbol	Unit	Nominal Anchor Diameter			
			1/4"		3/8"	
Drill Bit Diameter	d_o	in (mm)	1/4 (6.4)		3/8 (9.5)	
Nominal Embedment Depth	h_{nom}	in (mm)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)
Effective Embedment Depth	h_{ef}	in (mm)	1.24 (31.6)	2.01 (51.1)	1.21 (30.8)	1.98 (50.3)
Minimum Hole Depth	h_{hole}	in (mm)	2 (51)	2-7/8 (73)	2 (51)	2-7/8 (73)
Fixture Hole Diameter	d_r	in (mm)	3/8 (9.5)		1/2 (12.7)	
Maximum Installation Torque ²	$T_{inst,max}$	ft.lb (Nm)	21 (29)		N/A	
Maximum Impact Wrench Torque Rating	$T_{impact,max}$	ft.lb (Nm)	135 (185)		135 (185)	
Minimum Concrete Thickness	h_{min}	in (mm)	4 (102)	4-3/8 (110)	4 (102)	4-3/8 (110)
Critical Edge Distance	c_{ac}	in (mm)	1.5 h_{ef}			
Minimum Edge Distance (c_{min})	c_{min}	in (mm)	1-3/4 (44)			
Minimum Spacing (s_{min})	s_{min}	in (mm)	3 (76)			
Internal Thread Size	-	-	1/4-20 or 3/8-16 (UNC Coarse)		3/8-16 or 1/2-13 (UNC Coarse)	

1. The tabulated data is to be used in conjunction with the design criteria given in ACI 318 (-19 and -14) Chapter 17 or ACI 318-11 Appendix D, as applicable.

2. N/A - Manual torque wrench installation not evaluated.



ROD HANGERS

ZINC PLATED FOR STEEL & WOOD

PERFORMANCE DATA

Rod Hanger Anchor With Hex Coupler Head Design Design Information^{1,2}

Characteristics	Symbol	Unit	Nominal Anchor Diameter			
			1/4"		3/8"	
Drill Bit Diameter	d_o	in (mm)	1/4 (6.4)		3/8 (9.5)	
Nominal Embedment Depth	h_{nom}	in (mm)	1-5/8 (41)	2-1/2 (64)	1-5/8 (41)	2-1/2 (64)
Effective Embedment Depth	h_{ef}	in (mm)	1.24 (31.6)	2.01 (51.1)	1.21 (30.8)	1.98 (50.3)
Anchor Category	1, 2 or 3	-	3	2	1	1
Steel Strength in Tension & Shear						
Minimum Specified Ultimate Strength	f_{uta}	psi (N/mm ²)	101,525 (700)		101,525 (700)	
Minimum Specified Yield Strength	f_y	psi (N/mm ²)	81,220 (560)		81,220 (560)	
Effective Stress Area (Screw Anchor Body)	A_{se}	in ² (mm ²)	0.0453 (29.2)		0.1020 (65.8)	
Steel Strength in Tension	N_{sa}	lb (kN)	4,585 (20.4)		10,355 (46.1)	
Strength Reduction Factor for Steel Failure in Tension	ϕ_{sa}	-			0.65	
Steel Strength in Shear	V_{sa}	lb (kN)	1,350 (6.0)		3,150 (14.0)	
Steel Strength in Shear, Seismic	$V_{sa,eq}$	lb (kN)	1,125 (5.0)		1,800 (8.0)	
Strength Reduction Factor for Steel Failure in Shear	ϕ_{sa}	-			0.60	
Pullout Strength in Tension³						
Pullout Strength in Uncracked Concrete	$N_{p,uncr}$	lb (kN)	N/A	4,025 (17.9)	2,990 (13.3)	N/A
Pullout Strength in Cracked Concrete	$N_{p,cr}$	lb (kN)	605 (2.7)	1,080 (4.8)	1,755 (7.8)	2,630 (11.7)
Pullout Strength in Cracked Concrete, Seismic	$N_{p,eq}$	lb (kN)	605 (2.7)	1,080 (4.8)	1,755 (7.8)	2,630 (11.7)
Normalization Exponent, Uncracked Concrete	n	-	0.50		0.50	
Normalization Exponent, Cracked Concrete	n	-	0.40		0.50	
Strength Reduction Factor for Pullout Strength in Tension	ϕ_p	-	0.45	0.55	0.65	0.65
Concrete Breakout Strength in Tension						
Effective Embedment	h_{er}	in (mm)	1.24 (31.6)	2.01 (51.1)	1.21 (30.8)	1.98 (50.3)
Effectiveness Factor for Uncracked Concrete	k_{uncr}	in-lb (SI)	24 (10.0)	24 (10.0)	24 (10.0)	24 (10.0)
Effectiveness Factor for Cracked Concrete	k_{cr}	in-lb (SI)	17 (7.1)	17 (7.1)	17 (7.1)	17 (7.1)
Strength Reduction Factor for Concrete Breakout Strength in Tension	ϕ_{cb}	-	0.45	0.55	0.65	0.65

Table Continues On Next Page...



ROD HANGERS

ZINC PLATED FOR STEEL & WOOD

PERFORMANCE DATA

Rod Hanger Anchor With Hex Coupler Head Design Design Information^{1,2}

Characteristics	Symbol	Unit	Nominal Anchor Diameter			
			1/4"		3/8"	
Concrete Breakout Strength in Tension						
Axial Stiffness in Service Load Range in Uncracked Concrete	β_{uncr}	lb/inch x 10 ⁵ (N/mm)	2.719 (48)	1.928 (34)	6.240 (109)	4.502 (79)
COV for β_{uncr}	v	%	38			
Axial Stiffness in Service Load Range in Cracked Concrete	β_{cr}	lb/inch x 10 ⁵ (N/mm)	1.451 (25)	1.100 (19)	3.318 (58)	2.563 (45)
COV for β_{cr}	v	%	48			
Concrete Breakout Strength in Shear						
Nominal Diameter	d_o^2	in (mm)	0.250 (6.4)		0.375 (9.5)	
Load Bearing Length of Anchor	l_e	in (mm)	1.24 (31.6)	2.01 (51.1)	1.21 (30.8)	1.98 (50.3)
Reduction Factor of Concrete Breakout Strength in Shear	Φ_{cb}	-	0.70			
Concrete Pryout Strength in Shear						
Coefficient for Pryout Strength	k_{cp}	-	1.0	1.0	1.0	1.0
Reduction Factor for Pryout Strength in Shear	Φ_{cp}	-	0.70			

- The tabulated data is to be used in conjunction with the design criteria given in ACI 318 (-19 and -14) Chapter 17 or ACI 318-11 Appedix D, as applicable.
- The strength reduction factor applies when the load combination from the IBC or ACI 318 are used and the requirements of ACI 318-19 17.5.3, ACI 318-14 17.3.3 or ACI 318-11 D.4.3, as applicable, are met. If the load combinations of ACI 318-11 Appedix C are used, the appropriate value of f must be determined in accordance with ACI 318-11 D.4.5.

Example SAH-Z Screw Anchor With Hex Washer Head Allowable Stress Design Values For Illustrative Purposes^{1,2,3,4,5,6,7,8,9,10}

Nominal Anchor Diameter d_o (inch)	Nominal Embedment Depth h_{nom} (inch)	Allowable Tension Load $T_{allowable,ASD}$ (lb)
1/4	1-5/8	504
1/4	2-1/2	1,271
3/8	1-5/8	613
3/8	2-1/2	1,313


- Single anchor
- Single tension loading only
- Concrete determined to remain uncracked for the life of the anchorage.
- Load combinations taken from ACI 318 (-19 or -14) Section 5.3 or ACI 318-11 Section 9.2, as applicable with no seismic loading.
- 30% Dead Load (D) and 70% Live Load (L), controlling load combination 1.2 D +1.6L.
- Calculation of the weighted average of $a= 1.2 \times 0.3 + 1.6 \times 0.7 = 1.48$
- Nominal weight concrete, $f'_c=2,500$ psi.
- $c_{a1} = c_{a2} \geq c_{ac}$
- Concrete thickness $h \geq h_{min}$
- Values are for Condition B (supplementary reinforcement in accordance with ACI 318 (-19 or -14) 17.3.3 or ACI 318-11 D.4.3 is not provided)




ROD HANGERS

ZINC PLATED FOR STEEL & WOOD

PRODUCT SPECIFICATIONS

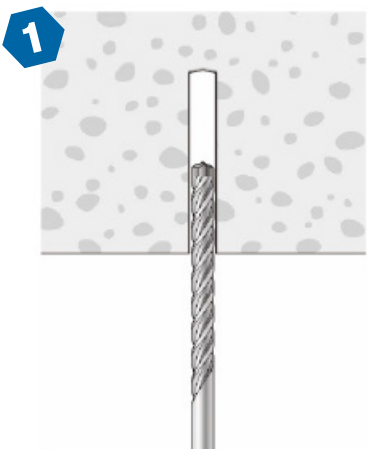

1. Drill a hole into the base material to the required depth using a drill bit that meets the requirements of ANSI B212.15.

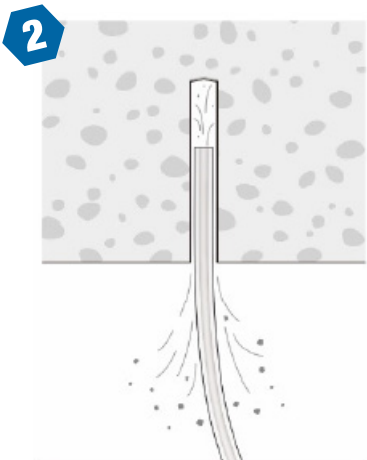

2. Remove dust and debris from the hole using a hand pump or compressed air.




3. Select a powered impact wrench of a torque wrench, attach an appropriate sized hex socket to the wrench and mount the screw anchor head into the socket.



4. Install the anchor with an impact wrench through the surface. The correct force should be considered during the installation to make sure the socket doesn't do damage to the member surface or self-inflict any damage to its connecting threads.

ORDERING INFORMATION

ZINC PLATED - FOR STEEL




Part#	Screw Size	Rod Size	Socket Size	Qty/Box
1AFS381	1/4-20 x 1	3/8	1/2	50
1AFS38N	1/4-20 x 1 w/ Nut	3/8	1/2	50
1AFS38	1/4-20 x 2	3/8	1/2	50

**ROD HANGERS**

ZINC PLATED FOR STEEL & WOOD

ORDERING INFORMATION

ZINC PLATED - FOR STEEL



Part#	Screw Size	Rod Size	Socket Size	Qty/Box
1AFSH381	1/4-20 x 1	3/8	1/2	50
1AFSH381N	1/4-20 x 1 w/ Nut	3/8	1/2	50
1AFSH3812	1/4-20 x 2	3/8	1/2	50
1AFSH3812N	1/4-20 x 2 w/ Nut	3/8	1/2	50

For Steel - Ultimate Load Capacities When Installed In Steel^{1,2}

Part No.	Screw Description	Mount Direction	Rod Coupler Size	Steel Gauge Thickness (in.)						
				16 0.060 lbs.	14 0.075 lbs.	12 0.105 lbs.	1/8 0.125 lbs.	3/16 0.187 lbs.	1/4 0.250 lbs.	1/2 0.500 lbs.
1AFS381	1/4-20 x 1	Vertical	3/8"	785	1,140	1,740	2,375	4,695	-	-
1AFS38N	1/4-20 x 1 w/ Nut	Vertical	3/8"	3,435	4,025	4,280	4,690	5,810	-	-
1AFS38	1/4-20 x 2	Vertical	3/8"	785	1,140	1,740	2,375	4,695	-	-
Horizontal in Steel										
1AFSH381	1/4-20 x 1	Horizontal	3/8"	1,740	1,945	2,420	2,570	2,810	-	-
1AFSH381N	1/4-20 x 1 w/ Nut	Horizontal	3/8"	2,755	2,810	2,570	2,810	2,810	-	-
1AFSH3812	1/4-20 x 2	Horizontal	3/8"	1,740	1,945	2,420	2,570	2,810	-	-
1AFSH3812N	1/4-20 x 2 w/ Nut	Horizontal	3/8"	2,755	2,810	2,570	2,810	2,810	-	-


- The values listed above are ultimate load capacities which must be reduced by minimum safety factor of 3.0 or greater to determine the allowable working load.
- The strength of the threaded rod used with the rod hangers must be considered when determining the controlling load capacity of the assembly.

**ROD HANGERS**

ZINC PLATED FOR STEEL & WOOD

ORDERING INFORMATION**ZINC PLATED - FOR WOOD**

Part#	Screw Size	Rod Size	Socket Size	Qty/Box
1AFG382	1/4 x 2	3/8	5/8	50
1AFG38	5/16 x 2-1/2	3/8	1/2	50



Part#	Screw Size	Rod Size	Socket Size	Qty/Box
1AFGH382	1/4 x 2	3/8	5/8	50
1AFGH38	5/16 x 2-1/2	3/8	1/2	50

**For Wood - Ultimate Load Capacities When Installed In Wood^{1,2}**

Part No.	Screw Description	Mount Direction	Rod Coupler Size	Load Lbs.*
1AFG382	1/4 x 2	Vertical	3/8"	1,510
1AFG38	5/16 x 2-1/2	Vertical	3/8"	2,670
Horizontal in Steel				
1AFGH382	1/4 x 2	Horizontal	3/8"	1,080
1AFGH38	5/16 x 2-1/2	Horizontal	3/8"	1,450

*Ultimate Loads in Douglas Fir, Pine and Spruce

- Truss/joist manufacturers may require pre-drilled holes with wood depending on the location of the anchor installation. Consult with the truss/joist manufacturer for details.
- The values listed above are ultimate load capacities that must be reduced by a minimum safety factor of 3.0 or greater to determine the allowable working load.

ORDERING INFORMATION**ACCESSORIES**

Part#	Description	Image
5DSPE-14-6	1/4" x 6-3/4" Enduro SDS-Plus 4 Cutter Bit	
5DSPE-38-6	3/8" x 6-3/4" Enduro SDS-Plus 4 Cutter Bit	
5MNS121304	1/2 x 1-3/4 Magnetic Nut Setter	
5DWMT73934	1/2 Impact Deep Well Socket 1/2-Square Drive	
5DWMT73939B	3/4 Impact Deep Well Socket - 1/2 Square Drive	
51837573	1/2-Square Impact Socket Extension/Adapter 1/4 Hex Shank	